

Call 925-455-5267

# GT1™ LED Pedestrian Signals

16 x 18 inch Side by Side -  
Full Hand, Full Person

## Excellent Appearance & Visibility

- Robust LED system design enables high luminous intensity over long product life
- Efficient optical system minimizes power consumption while providing excellent uniformity and viewing angles
- New! Single piece transparent front window with internal masking to prevent:
  - icons display from being readily visible when not in operation
  - scratches and abrasions compared with external silk screen technology
- Bright and clear icons
- New or retrofit use

## Outstanding Reliability & Robust Operation

- Internal conflict monitor preventing walk and don't walk indications to light up at the same time
- Individual power supply drives each display to ensure proper indication
- Over-molded electrical connectors providing moisture and dust protection

## Meets Rigorous Certification & Testing Standards

- Intertek ETL Verified compliant
- EPACT 2005 compliant
- Designed to meet Caltrans specifications
- Using MIL-STD-810F and NEMA 250-1991 Type 4 for environmental robustness, passed reliability and qualification testing including high temperature, high humidity cycling (HTHH for 1,000 hours)
- Production quality compliant to GE Six Sigma requirements
- Compliant with the ITE PTCSI Part 2 LED Pedestrian Traffic Signal Modules dated March 19, 2004



imagination at work




The Greatest Signals Stand the Test of Time.™

# GT1™ LED Pedestrian Signals

- 16 x 18 inch module

## Mechanical Outline Dimensions in inches. (mm) indicates metric equivalent

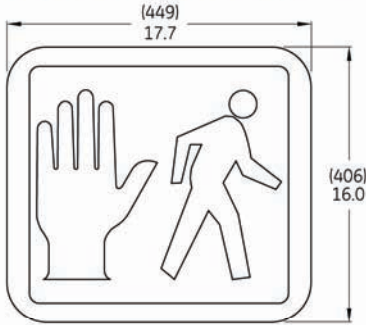

## Design Compliance

Test type	Compliance
Luminous Intensity	A: ITE Pedestrian Traffic Control Signal Indications - Part 2: LED Pedestrian Traffic Signal Modules <sup>2</sup> - March 2004 B: Caltrans <sup>3</sup>
Chromaticity	ITE PTCSI-STD Part 2 - March 2004
Moisture Resistance	Blown Wind Rain MIL-STD-810F method 506.4 - NEMA 250 type 4
Mechanical Vibration	MIL-STD-883 Method 2007 Sec. 2.1.8 NEMA TS 2-2003
Electronic Noise	FCC Title 47 Sec 15 Sub. B <sup>1</sup>
Transient Voltage Protection	ITE PTCSI-STD Part 2 - March 2004 Sec. 2.1.8 NEMA TS 2-2003
Controller Compatibility	NEMA TS-2-1992
Wiring	National Electric Code

<sup>1</sup> Class A

## Operating Specifications

Parameter	Rating
Operating Temperature Range*	-40 to +74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90 %
Total Harmonic Distortion (THD)	< 20 %
Voltage Turn-Off (VTO)	35 V
Start-up Time	< 75msec
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	16 AWG, Color Coded with Strain Relief
LED Color	Hand: Portland Orange Person: Lunar White
Default Mode	Hand only

\* Performed in compliance with ITE test method described in the technical notes

## Product Information

Model Number	Dimensions		Symbol		AC Voltage Nominal	Power (W)		Beam Pattern Degrees	Minimum Luminous Intensity Cd/m <sup>2</sup>	
	Dimensions	Layout	Hand	Person		Hand	Person		Hand	Person
PS7-CFC1-26A <sup>2</sup>	16 x 18 in	Side by Side	Full	Full	120V - 60Hz	5	5	26	1400	2200
PS7-CFC1-46A <sup>3</sup>	16 x 18 in	Side by Side	Full	Full	120V - 60Hz	5	5	26	3750	5300

<sup>2</sup> ITE PTCSI-Standards Part 2

<sup>3</sup> Caltrans Standards

Test Condition: T<sub>a</sub> = 25°C. All values are design or typical values when measured under laboratory conditions.

Distributed by:

